

ZHIYU

HIGH-END LED DISPLAY SOLUTIONS

PRODUCT CATALOGUE



CONTENTS

01

Enterprise section

Company Profile
Production and Manufacturing
Enterprise Honor
Corporate Culture
Employee Showcase

02

Product section

Commercial Display
Advertisement Display
Meeting Display
Rental Display
Creative Display

03

Cases

Cases

COMMERCIAL DISPLAY SERIES



Application scenarios: conference room, command and control center, monitoring room, science and technology exhibition hall, airport, shopping center, studio, high-end business display and other scenarios.

INDOOR SMALL PIXEL PITCH X3-SMD SERIES



Product features



Perfect display



Wide color gamut



Ultra thin



High refresh rate



Dual system



Front Maintenance



High gray




Wide Viewing-angle




Silent operation

Functional characteristics

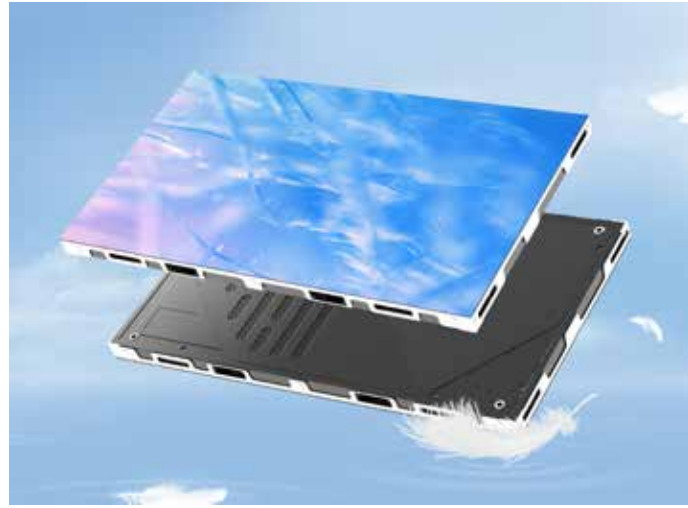


Ultra Slim

Cabinet weight 4.5kg, thickness is only 27.5mm. Small and portable.

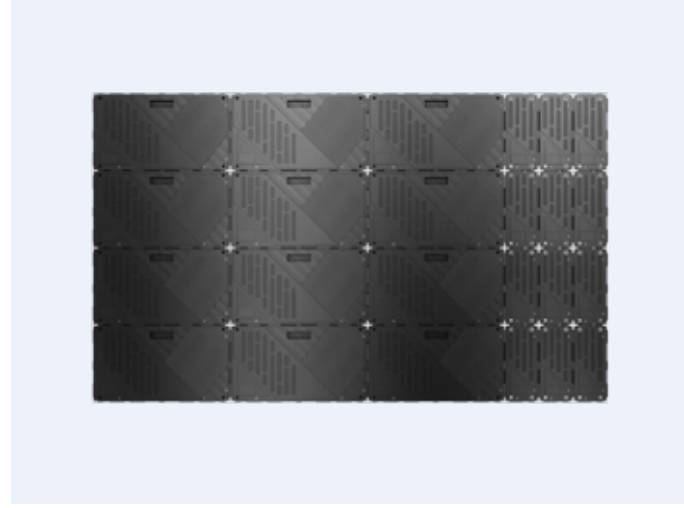

Interlocking of large and small cabinets

The X3-SMD series has specially launched a small cabinet body, which can flexibly supplement sizes, Facilitate customers to create more creative styles.

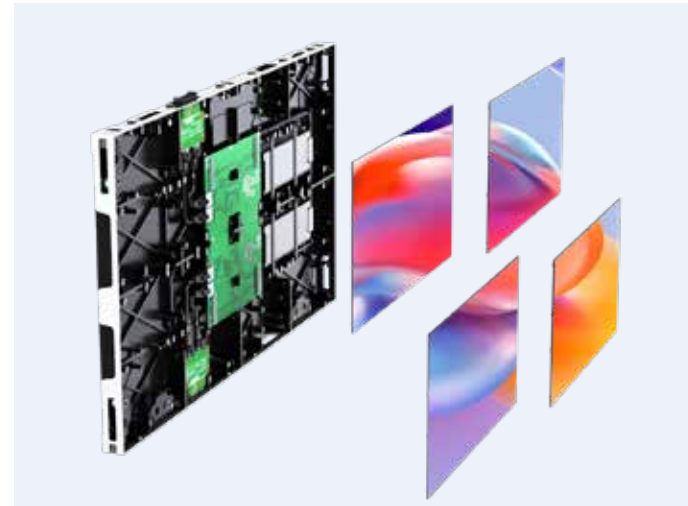


Convenient maintenance

Module, Receiving card and power supply before maintenance, convenient installation and maintenance. Double backup design, and more secure and stable operation.



Right Angle splicing


Supports a variety of installation methods, can realize right Angle splicing, structure fine-tuning technology, to ensure the flatness of product splicing.

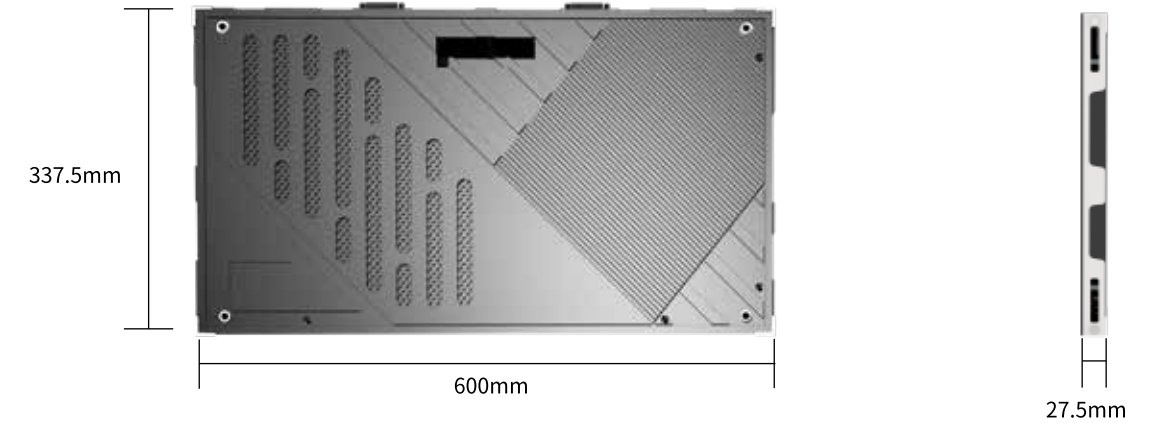

Product Parameter

Pixel Pitch	P1.25	P1.56	P1.875	P2.5
LED Type	SMD1010/GOB	SMD1010/1212/GOB	SMD1010/1515/GOB	SMD1515/GOB
Physical density(Dot/sqm)	640000	409600	284444	160000
Module resolution	240X135	192X108	160X90	60X135
Module size(mm)	300X168.75	300X168.75	300X168.75	150X337.5
Panel Dimension (WXHxD/mm)	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5
Panel Resolution	480X270	384X216	320X180	240X135
Module QTY(WXH)	2X2	2X2	2X2	4X1
Cabinet weight(kg)	4.5	4.5	4.5	4.5
Maintenance Mode	Front maintenance	Front maintenance	Front maintenance	Front maintenance
Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Brightness Calibration	Have	Have	Have	Have
Brightness(Nits)	≥600	≥600	≥600	≥600
Color temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle(V/H)	170°/170°	170°/170°	170°/170°	170°/170°
Brightness/Color uniformity	≥99.8%	≥99.8%	≥99.8%	≥99.8%
Contrast ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame rate	50/60	50/60	50/60	50/60
Drive mode	1/45 scan	1/48 scan	1/45 scan	1/30 scan
Grey level	16bit	16bit	16bit	16bit
Refresh rate(Hz)	3840	3840	3840	3840
Max. power consumption(W/sqm)	350	350	350	350
Avg. power consumption(W/sqm)	100	100	100	100
Protection grade	IP31	IP31	IP31	IP31
Input Power	AC90-264V,47-63Hz			
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%			
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%			
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC			

INDOOR SMALL PIXEL PITCH X3-COB SERIES

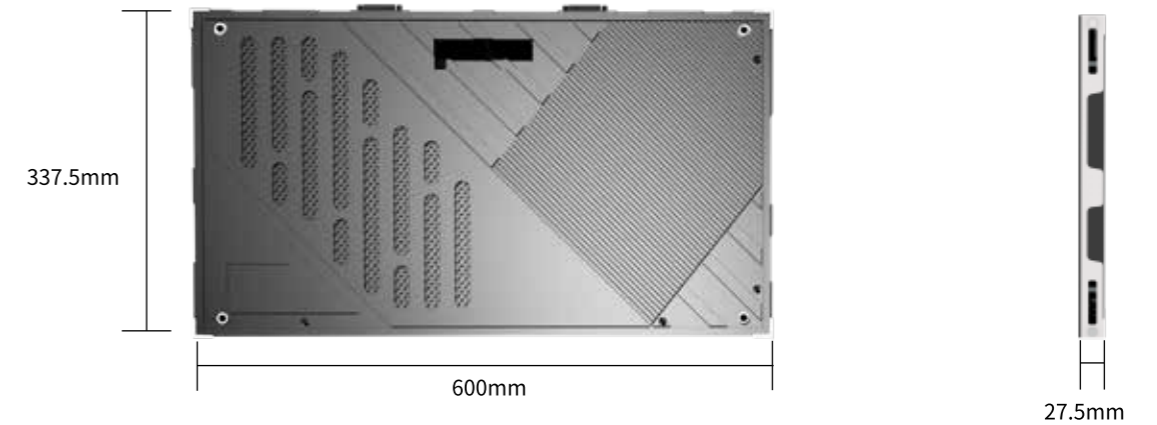


Product features

- Perfect display
- Wide color gamut
- Ultra thin
- High refresh rate
- Dual system
- Front Maintenance
- High gray
- Wide Viewing-angle
- Silent operation

Product Parameter

Pixel Pitch	P0.625	P0.78	P0.9375	P1.25	P1.56	P1.875
LED Type	COB	COB	COB	COB	COB	COB
Physical density(dot/sqm)	2560000	1638400	1137778	640000	409600	284444
Module resolution	240X270	192X216	160X180	120X135	96X108	80X90
Module size(mm)	150X168.75	150X168.75	150X168.75	150X168.75	150X168.75	150X168.75
Panel Dimension (WXHXD/mm)	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5
Panel Resolution	960X540	768X432	640X360	480X270	384X216	320X180
Module QTY(WXH)	4X2	4X2	4X2	4X2	4X2	4X2
Cabinet weight(kg)	4.5	4.5	4.5	4.5	4.5	4.5
Drive mode	1/64 scan	1/64 scan	1/60 scan	1/60 scan	1/54 scan	1/45 scan
Maintenance Mode	Front maintenance					
Cabinet Material	Die-cast Aluminum					
Brightness Calibration	Have					
Brightness(Nits)	≥600					
Color temperature(K)	500-12000 Optional					
Viewing angle(V/H)	170°/170°					
Brightness/Color uniformity	≥99.8%					
Contrast ratio	10000 : 1					
Frame Rate	50/60					
Grey level	16bit					
Refresh rate(Hz)	3840					
Max. power consumption(W/sqm)	420					
Avg. power consumption(W/sqm)	80-150					
protection grade	IP31					
Input Power	AC90-264V,47-63Hz					
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC					

INDOOR SMALL PIXEL PITCH X3-CURVE SERIES

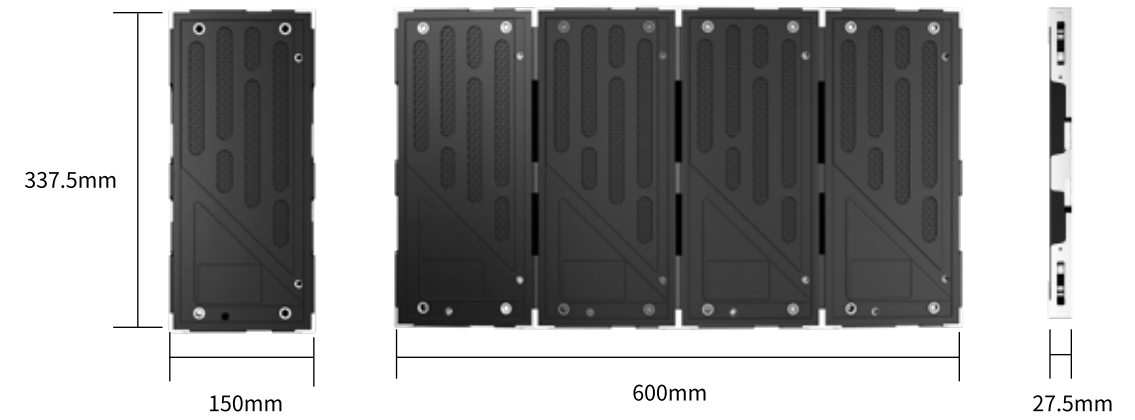

Product features

- Perfect display
- Wide color gamut
- Ultra thin
- Create creative styling
- Small box body
- Front Maintenance
- High refresh rate
- Wide Viewing-angle
- Dual system

Product Parameter

Pixel Pitch	P0.78	P0.9375	P1.25	P1.56	P1.875	P2.5
LED Type	Mini 4-in-1	COB	SMD1010	SMD1010/1212	SMD1010/1515	SMD1515/GOB
Physical density(dot/sqm)	1638400	1137778	640000	409600	284444	160000
Module resolution	192X216	160X180	240X135	190X108	160X90	60X135
Module size(mm)	150X168.75	150X168.75	150X337.5	150X337.5	150X337.5	150X337.5
Panel Dimension (WXHDXD/mm)	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5
Panel Resolution	768X432	640X360	480X270	384X216	320X180	240X135
Module QTY(WXH)	4X2	4X2	4X1	4X1	4X1	4X1
Cabinet weight(kg)	4.5					
Maintenance Mode	Front maintenance					
Cabinet Material	Die-cast Aluminum					
Brightness Calibration	Have					
Brightness(Nits)	≥600					
Color temperature(K)	5000-12000 Optional					
Viewing angle(V/H)	170°/170°					
Brightness/Color uniformity	≥99.8%					
Contrast ratio	10000 : 1					
Frame Rate	50/60					
Drive mode	1/64 scan	1/60 scan	1/45 scan	1/48 scan	1/45 scan	1/30 scan
Grey level	16bit	16bit	16bit	16bit	16bit	16bit
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	350	350	350	350	350	350
Avg. power consumption(W/sqm)	100	100	100	100	100	100
protection grade	IP31	IP31	IP31	IP31	IP31	IP31
Input Power	AC90-264V,47-63Hz					
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC					

INDOOR SMALL PIXEL PITCH

Mi-pro SERIES



Product features

- Perfect display**
- Wide color gamut**
- Ultra thin**
- High refresh rate**
- Dual system**
- Front Maintenance**
- High gray**
- Wide Viewing-angle**
- Silent operation**

Product Parameter

Pixel Pitch	P0.9375	P1.25	P1.56	P1.875	P2.5
LED Type	Mini 4-in-1	SMD1010	SMD1010/1212	SMD1010/1515	SMD1515
Physical density(dot/sqm)	1137778	640000	409600	284444	160000
Module resolution	320X180	240X135	192X108	160X90	60X135
Module size(mm)	300X168.75	300X168.75	300X168.75	300X168.75	150X337.5
Panel Dimension (WXHXD/mm)	600X337.5X48	600X337.5X48	600X337.5X48	600X337.5X48	600X337.5X48
Panel Resolution	640X360	480X270	384X216	320X180	240X135
Module QTY(WXH)	2X2	2X2	2X2	2X2	4X1
Cabinet weight(kg)	7.0	7.0	7.0	7.0	7.0
Maintenance Mode	Front maintenance	Front maintenance	Front maintenance	Front maintenance	Front maintenance
Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Brightness Calibration	Have	Have	Have	Have	Have
Brightness(Nits)	≥600	≥600	≥600	≥600	≥600
Color temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle(V/H)	170°/170°	170°/170°	170°/170°	170°/170°	170°/170°
Brightness/Color uniformity	≥99.8%	≥99.8%	≥99.8%	≥99.8%	≥99.8%
Contrast ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60
Drive mode	1/60 scan	1/45 scan	1/48 scan	1/45 scan	1/30 scan
Grey level	16bit	16bit	16bit	16bit	16bit
Refresh rate(Hz)	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	420	420	420	420	420
Avg. power consumption(W/sqm)	100	100	100	100	100
protection grade	IP31	IP31	IP31	IP31	IP31
Input Power	AC90-264V,47-63Hz				
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%				
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%				
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC				

ADVERTISING DISPLAY SERIES

2



Application scenario: Advertising brand, landmark brands, street billboards, transportation hubs, shopping malls, enterprise and institutions, hotels, gymnasiums, commercial real estate and other indoor and outdoor scenes.

INDOOR FIXED INSTALLATION T3-PRO SERIES



Product features



Ultra high definition



Light weight



Front maintenance



Flexible assembly





Right angle splicing



High gray high refresh rate

Product Parameter

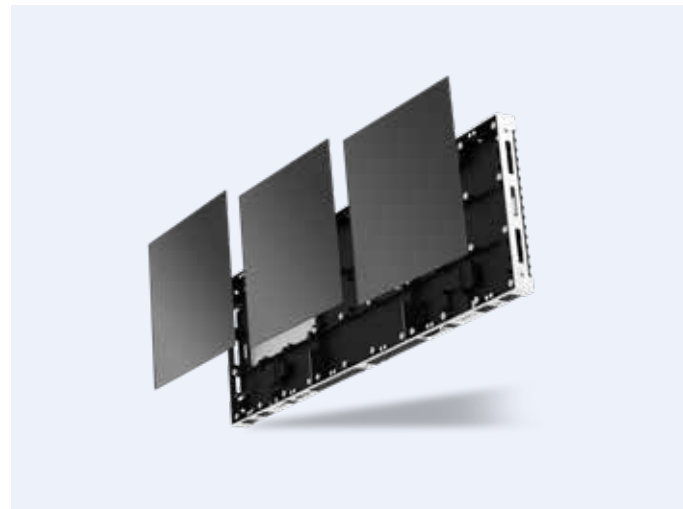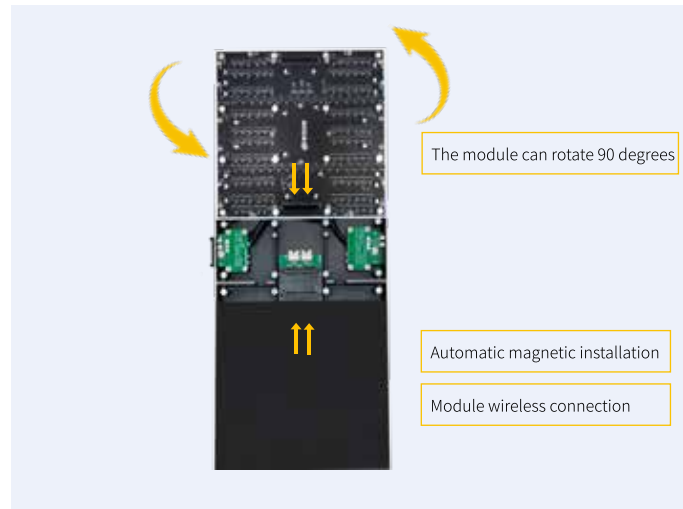


Innovative module

The innovative design of the module ensures that the viewing angle of the light beads is not affected when rotating the module direction impact, there will be no color difference.


Front installation and maintenance

Support front installation and maintenance, with zero space constraints.

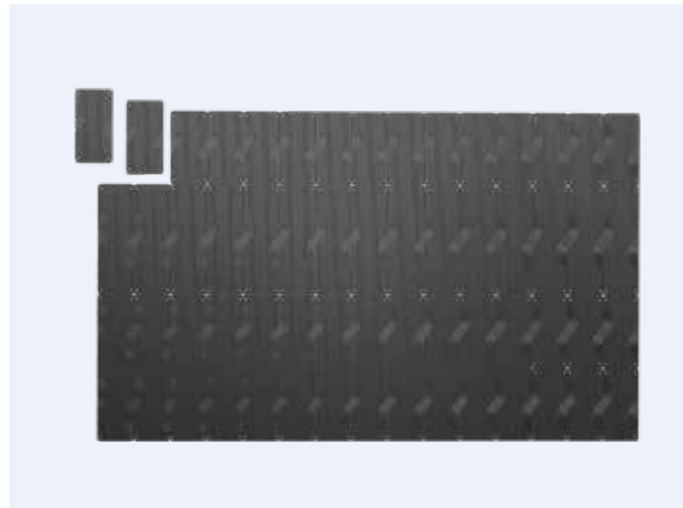

Free splicing, flexible display

Four types of cabinets can be flexibly spliced horizontally and vertically.

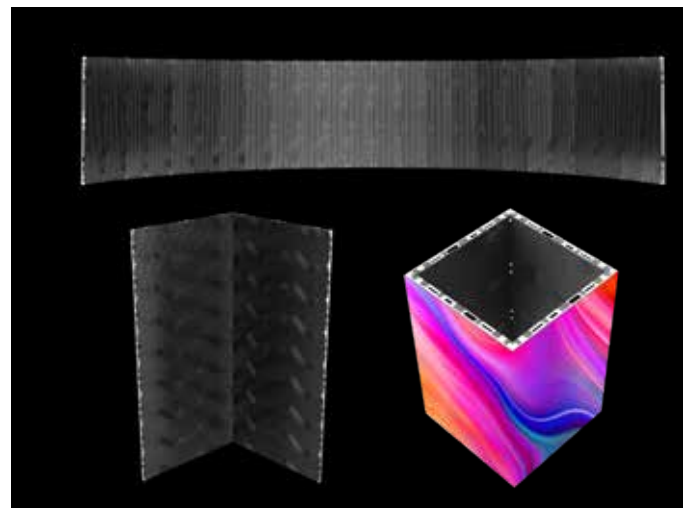

Creative splicing

Supports shapes such as right angles and cylinders to meet various creative splicing needs.




	500X250X33mm	3.0kg
	750X250X33mm	4.0kg
	1000X250X33mm	5.0kg
	1000X500X33mm	9.8kg

Product Parameter

Pixel Pitch	P1.25	P1.56	P1.95	P2.5	P2.604	P2.976	P3.91
LED Type	SMD1010(GOB)	SMD1212(GOB)	SMD1515(GOB)	SMD1515	SMD1515	SMD1515	SMD2020
Physical density(dot/sqm)	640000	409600	262144	160000	147456	112896	65536
Module resolution	200×200	160×160	128×128	100×100	96×96	84×84	64×64
Module dimension(mm)	250×250	250×250	250×250	250×250	250×250	250×250	250×250
Panel size(mm)	1000×500×33	1000×500×33	1000×500×33	1000×500×33	1000×500×33	1000×500×33	1000×500×33
	1000×250×33	1000×250×33	1000×250×33	1000×250×33	1000×250×33	1000×250×33	1000×250×33
	750×250×33	750×250×33	750×250×33	750×250×33	750×250×33	750×250×33	750×250×33
	500×250×33	500×250×33	500×250×33	500×250×33	500×250×33	500×250×33	500×250×33
Module quantity(WXH)	4X2/4X1/3X1/2X1	4X2/4X1/3X1/2X1	4X2/4X1/3X1/2X1	4X2/4X1/3X1/2X1	4X2/4X1/3X1/2X1	4X2/4X1/3X1/2X1	4X2/4X1/3X1/2X1
	800×400	640×320	512×256	400×200	384×192	336×168	256×128
	800×200	640×160	512×128	400×100	384×96	336×84	256×64
	600×200	480×160	384×128	300×100	288×96	252×84	192×64
Panel resolution	400×200	320×160	256×128	200×100	192×96	168×84	128×64
Maintenance	Front access	Front access	Front access	Front access	Front access	Front access	Front access
Cabinet material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Single point brightness correction	Have	Have	Have	Have	Have	Have	Have
Brightness(Nits)	600	600	800	800	800	800	800
Color temperature(K)	5000-12000 Optional						
Gray level	14/16 Optional						
Viewing angle(V/H)	160°/160°						
Brightness/Color uniformity	≥97%						
Contrast	10000:1						
Frame Rate	50/60						
Drive mode	1/50 scan	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	350	350	350	350	350	350	350
Avg. power consumption(W/sqm)	100-200	100-200	100-200	100-200	100-200	100-200	100-200
Protection grade	IP 31	IP 31	IP 31	IP 31	IP 31	IP 31	IP 31
Input Power	AC90-264V,47-63Hz						
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%						
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%						
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC						

DOUBLE-SIDED LED SCREEN

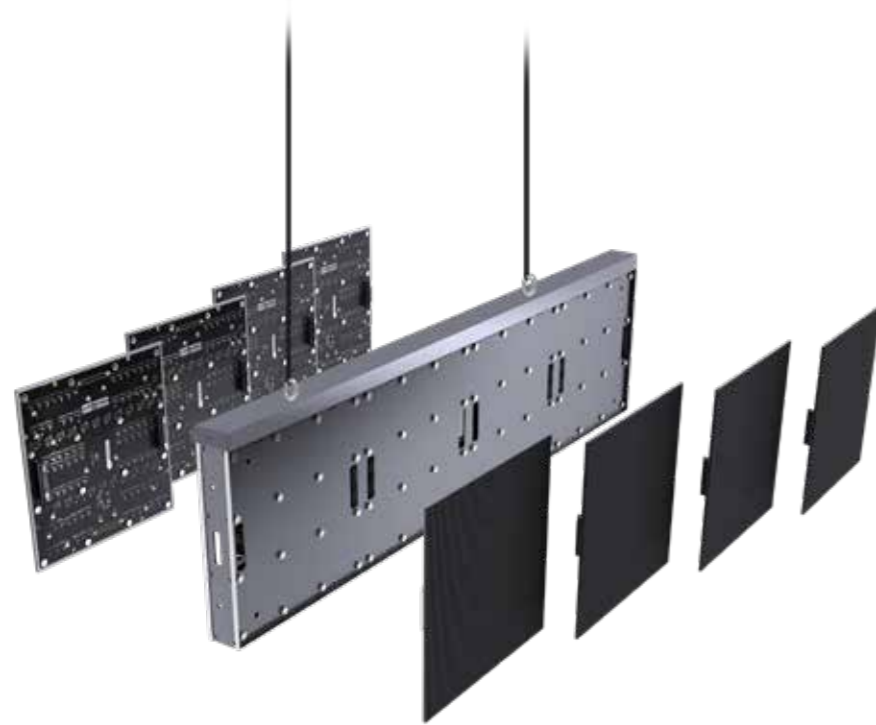

Product features

- Double side display**
- High brightness**
- Front Maintenance**
- High refresh rate**
- Ultra thin**
- Seamless splicing**

Product Parameter

Pixel pitch	P1.25	P1.56	P1.95	P2.5	P2.604	P2.976	P3.91
LED Type	SMD1010 (GOB)	SMD1212 (GOB)	SMD1515	SMD1515	SMD1515	SMD1515	SMD2121
Physical density(dot/sqm)	640000	409600	262144	160000	147456	112896	65536
Module resolution	200X200	160X160	128X128	100X100	96X96	84X84	64X64
Module dimension(mm)	250X250	250X250	250X250	250X250	250X250	250X250	250X250







Panel size(mm) 1000X250X54 / 750X250X54 / 500X250X54

Panel resolution	800×200 600×200 400×200	640×160 480×160 320×160	512×128 384×128 256×128	400×100 300×100 200×100	384×96 288×96 192×96	336×84 252×84 168×84	256×64 192×64 128×64
Module quantity(WXH)	4X1/3X1/2X1	4X1/3X1/2x1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1	4X1/3X1/2X1
Single point brightness correction	Have	Have	Have	Have	Have	Have	Have
Maintenance	Front access	Front access	Front access	Front access	Front access	Front access	Front access
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Brightness(Nits)	600	600	800	800	800	800	1000
Color temperature(K)	5000-12000 Optional						
Viewing angle(V/H)	160°/160°						
Brightness/Color uniformity	≥97%						
Contrast	10000:1						
Frame Rate	50/60						
Drive mode	1/50 scan	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan
Gray level	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	650	650	650	650	650	650	650
Avg. power consumption(W/sqm)	100-200	100-200	100-200	100-200	100-200	100-200	100-200
Input Power	AC90-264V,47-63Hz						
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%						
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%						
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC						

SINGLE SIDE POSTER G-T4 SERIES





Product features

-  HD performance
-  Intelligent split display
-  Wifi/Ethernet
-  Multiple interfaces
-  Sync & Async play
-  Multi-screen seamless splicing

Functional characteristics


Smart Split-Screen Multi-Use in One Screen

Multiple split-screen modes, with video and images/text playing synchronously, meeting various needs.

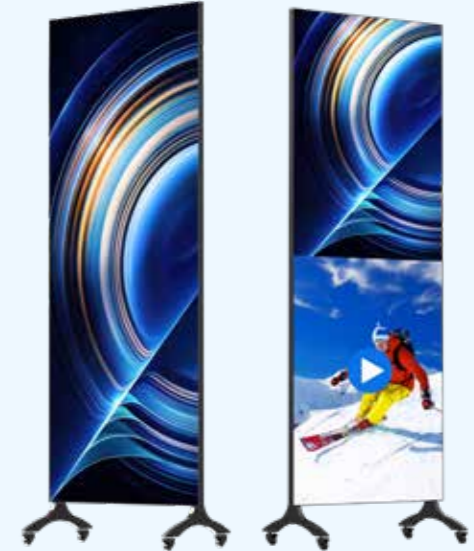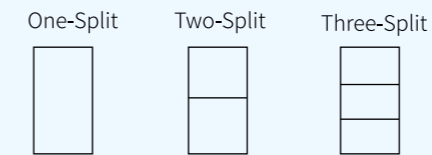

Multi-Screen Cascade Connection

Supports multi-screen cascading, with a resolution up to 2K, allowing up to 8 screens to be connected. Supports product combination cascading with sizes of 1006x2181mm / 756x2181mm.

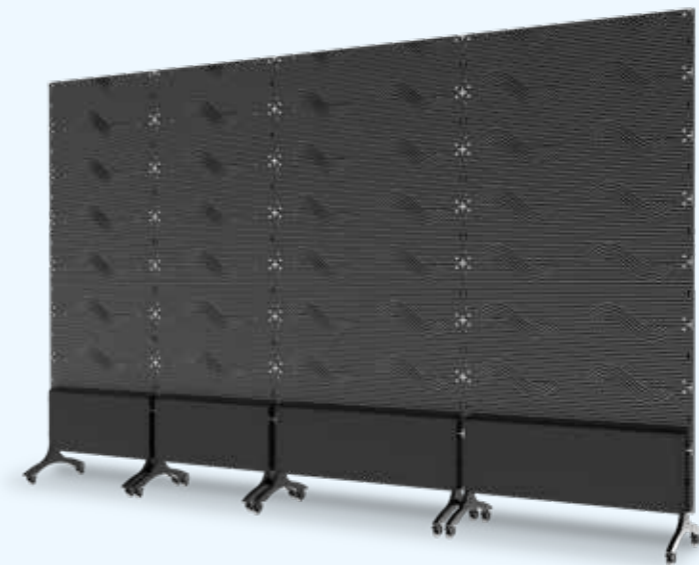

Multiple control modes

- Support multiple playback methods to adapt to different scenes.
- Support Sync and Async play.
- Multiple interfaces .



<p>Multiple playback methods</p> <p>PC Smart phone IPAD USB</p>	<p>Multiple interfaces</p> <p>WIFI HDMI LAN USB</p>	<p>Display modes</p> <p>Sync Async play</p>
---	---	---


Multiple installation modes



Multiple screen splicing

Stand on floor

Hoisting

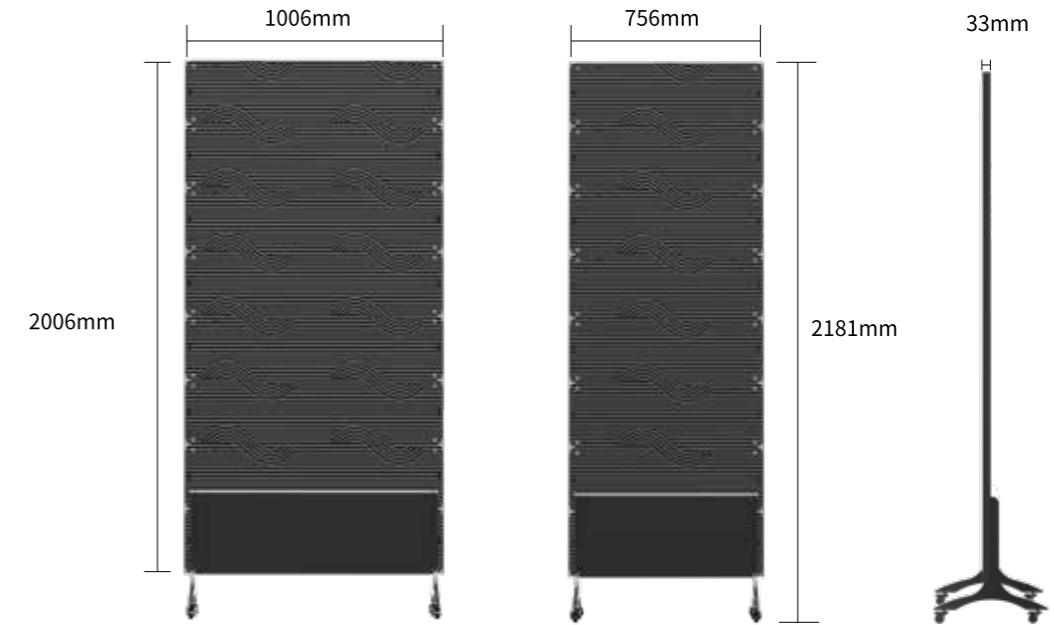

Product Parameter

Pixel	P1.25	P1.56	P1.95	P2.5	P2.604	P2.976	P3.91
LED type	SMD1010(GOB)	SMD1212/1010(GOB)	SMD1515	SMD1515	SMD1515	SMD1515	SMD2020
Physical Density(dots/m ²)	640000	409600	262144	160000	147456	112896	65536
Screen resolution(dots)	800X1600/600X1600	640X1280/480X1280	512X1025/384X1024	400X800/300X800	384X768/288X768	336X672/252X672	256X512/192X512
Module size(mm)	250X250	250X250	250X250	250X250	250X250	250X250	250X250
Display dimension(mm)	1000X2000X33 750X2000X33	1000X2000X33 750X2000X33	1000X2000X33 750X2000X33	1000X2000X33 750X2000X33	1000X2000X33 750X2000X33	1000X2000X33 750X2000X33	1000X2000X33 750X2000X33
Overall dimensions (mm)	1006X2181X33 756X2181X33	1006X2181X33 756X2181X33	1006X2181X33 756X2181X33	1006X2181X33 756X2181X33	1006X2181X33 756X2181X33	1006X2181X33 756X2181X33	1006X2181X33 756X2181X33
Maintenance mode	Front	Front	Front	Front	Front	Front	Front
Materials	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Brightness(Nits)	600	600	800	800	800	800	1000
Color temp(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle(V/H)	170°	170°	170°	170°	170°	170°	170°
Brightness/color uniformity	≥97%	≥97%	≥97%	≥97%	≥97%	≥97%	≥97%
Contrast ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/50 Scan	1/40 Scan	1/32 Scan	1/25 Scan	1/32 Scan	1/28 Scan	1/16 Scan
Gray scale(bit)	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840	3840
Max consumption(W/m ²)	400	400	400	400	400	400	400
Average consumption(W/m ²)	100-200	100-200	100-200	100-200	100-200	100-200	100-200
Power voltage range	AC90-264V,47-63Hz						
WorkingTemp/humidity(°C/RH)	-20~60°C/10%~85%						
Stock temp/humidity(°C/RH)	20~60°C/10%~85%						

Cert.

CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS

SINGLE SIDE POSTER G-X4 SERIES



Product features

- HD performance**
- Intelligent split display**
- Wifi/Ethernet**
- Multiple interfaces**
- Sync & Async play**
- Multi-screen seamless splicing**

Product Parameter

Pixel Pitch	P0.9375	P1.25	P1.56	P1.875	P2.5
LED type	COB	SMD1010(COB)	SMD1010/1212(COB)	SMD1010/1515(GOB)	SMD1010/1515(GOB)
Pixel density (dot/sqm)	1137778	640000	409600	284444	160000
Display dimension(mm)	600X2025X30	600X2025X30	600X2025X30	600X2025X30	600X2025X30
Overall Dimensions (mm)	606X2206X30	606X2206X30	606X2206X30	606X2206X30	606X2206X30
Display Pixels (Points)	640X2160	480X1620	384X1296	320X1080	240X810
Cabinet weight(kg)	37	37	37	37	37
Maintenance mode	Front	Front	Front	Front	Front
Cabinet material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Brightness (Nits)	≥600	≥600	≥600	≥600	≥600
Color temperature (K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle(V/H)	170°/170°	170°/170°	170°/170°	170°/170°	170°/170°
Brightness/Color uniformity	≥99.8%	≥99.8%	≥99.8%	≥99.8%	≥99.8%
Contrast ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60
Drive mode	1/60 scan	1/45 scan	1/48 scan	1/45 scan	1/45 scan
Greys level	16bit	16bit	16bit	16bit	16bit
Refresh rate (Hz)	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	420	420	420	420	420
Avg. power consumption(W/sqm)	100-200	100-200	100-200	100-200	100-200
Control mode	USB/LAN/WIFI/4G cloud(Optional)				
Power input	AC90-264V,47-63Hz				
Working temperature/humidity(°C/RH)	-20~60°C/10%~85%				
Storage temperature/humidity(°C/RH)	-20~60°C/10%~85%				
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS				

DOUBLE SIDED POSTER G-T5 SERIES



Product Parameter

Pixel Pitch	P1.25	P1.56	P1.95	P2.5	P2.604	P2.976	P3.91
LED type	SMD1010(GOB)	SMD1212(GOB)	SMD1515	SMD1515	SMD1515	SMD1515	SMD1515
Pixel density (dot/sqm)	640000	409600	262144	160000	147456	112896	65536
Display resolution (points)	600X1600	480X1280	384X1024	300X800	288X768	252X672	192X512
Module size (mm)	250X250	250X250	250X250	250X250	250X250	250X250	250X250
Display dimension(mm)	750X2000X54	750X2000X54	750X2000X54	750X2000X54	750X2000X54	750X2000X54	750X2000X54
Dimensions(mm)	756X2181X54	756X2181X54	756X2181X54	756X2181X54	756X2181X54	756X2181X54	756X2181X54
Weight (kg)	50.2	50.2	50.2	50.2	50.2	50.2	50.2
maintenance mode	Front	Front	Front	Front	Front	Front	Front
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Brightness (Nits)	600	600	800	800	800	800	1000
Color temperature (K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle(V/H)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Brightness/Color uniformity	≥97%	≥97%	≥97%	≥97%	≥97%	≥97%	≥97%
Contrast	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/50 scan	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan
Gray level	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional	14/16 Optional
Refresh rate (Hz)	3840	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	650	650	650	650	650	650	650
Avg. power consumption(W/sqm)	100-200	100-200	100-200	100-200	100-200	100-200	100-20
Power input	AC90-264V,47-63Hz						
Working temperature/humidity(°C/RH)	-20~60°C/10%~85%						
Storage temperature/humidity(°C/RH)	-20~60°C/10%~85%						
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS						

Product features



Double side display



Intelligent split display



Wifi/Ethernet



Multiple interfaces




Sync & Async play



Brightness customization

HIGH-END ENERGY-SAVING LED DISPLAY ES SERIES

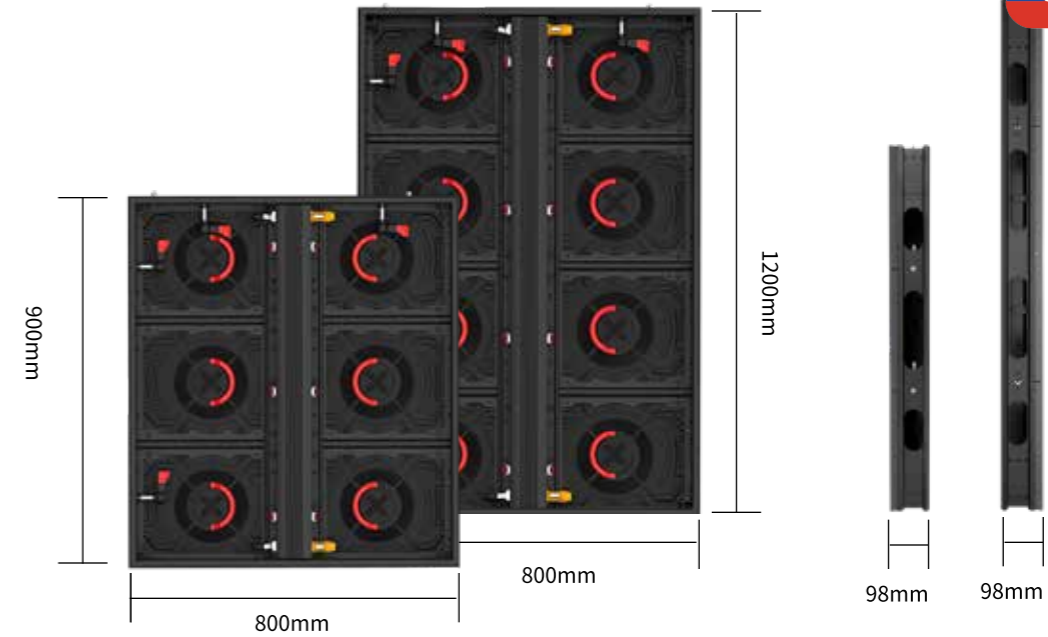

Product features



Energy saving
eye protection



High brightness



Front\rear
maintenance



High refresh rate



Wide viewing
angle



Stadium banner



High protection



Ultra thin



Seamless splicing

Product Parameter

Pixel Pitch	P3.125	P4.16	P5	P6.25	P8.33	P10
SMD type	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
Physical density (dots/sqm)	102400	57600	40000	25600	14400	10000
Module resolution	128X96	96X72	80X60	64X48	48X36	40X30
Module dimension	400X300	400X300	400X300	400X300	400X300	400X300
Panel size (mm)	800X900/800X1200	800X900/800X1200	800X900/800X1200	800X900/800X1200	800X900/800X1200	800X900/800X1200
Panel resolution (W×H)	256X288/256X384	192X216/192X288	160X180/160X240	128X144/128X192	96X108/96X144	80X90/80X120
Module quantity (W×H)	2X3/2X4	2X3/2X4	2X3/2X4	2X3/2X4	2X3/2X4	2X3/2X4
Cabinet weight (kg)	17.5/22.5	17.5/22.5	17.5/22.5	17.5/22.5	17.5/22.5	17.5/22.5
Maintenance mode	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Brightness (nits)	5500	6500	6500	6500	6500	6500
Color temperature (K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle (V/H)	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°
Best viewing distance	4-150m	4-150m	5-150m	6-200m	8-200m	10-300m
Contrast ratio	10000:1	10000:1	10000:1	10000:1	10000:1	10000:1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/16 scan	1/6 scan	1/6 scan	1/6 scan	1/3 scan	1/3 scan
Grey level	16bit	16bit	16bit	16bit	16bit	16bit
Refresh rate	3840	3840	3840	3840	3840	3840
Max power consumption (w/m ²)	780	780	780	780	780	780
Avg. power consumption (w/m ²)	200-300	200-300	200-300	200-300	200-300	200-300
Protection grade	IP65	IP65	IP65	IP65	IP65	IP65
Input Power	AC90-264V,47-63Hz					
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS					

STADIUM LED SCREEN ES SERIES



Product features



High-end customization



High brightness



Remote control



High refresh rate



Dual system



Front/rear maintenance



Seamless splicing



Wide Viewing-angle




Superior protection

Product Parameter

Pixel Pitch	P6.25	P8.33	P10
SMD type	SMD2727	SMD2727	SMD2727
Physical density (dots/sqm)	25600	14400	10000
Module resolution	64X48	48X36	40X30
Module dimension	400X300	400X300	400X300
Module quantity (W×H)	4X3	4X3	4X3
Panel resolution (W×H)	256X144	192X108	160X90
Panel size (mm)	1600X940X98	1600X940X98	1600X940X98
Maintenance mode	Front & Rear	Front & Rear	Front & Rear
Brightness (nits)	6500	6500	6500
Color temperature (K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Cabinet weight	35	35	35
Viewing angle (V/H)	140°/160°	140°/160°	140°/160°
Contrast ratio	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60
Drive mode	1/6 scan	1/3 scan	1/2 scan
Refresh rate	3840	3840	3840
Max power consumption (w/m ²)	680	680	680
Avg. power consumption (w/m ²)	120-200	120-200	120-200
protection grade	IP65	IP65	IP65
Input Power	AC90-264V,47-63Hz		
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%		
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%		
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC		

THE ARC CORNER OPTION ES -C SERIES



Product features



High end customization



High brightness



Front/Rear access



Remote control



Wide viewing angle




Superior protection

Product Parameter

Pixel pitch	P3.125	P4.16	P5	P6.25	P8.33	P10
SMD type	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
Physical density (dots/sqm)	102400	57600	40000	25600	14400	10000
Module resolution	16X96	12X72	10X60	8X48	6X36	5X30
Module dimension	50X300	50X300	50X300	50X300	50X300	50X300
Panel size (mm)	450X900/1200	450X900/1200	450X900/1200	450X900/1200	450X900/1200	450X900/1200
Panel resolution (W×H)	144X288/144X384	108X216/108X288	90X180/90X240	72X144/72X192	54X108/54X144	45X90/45X120
Module quantity (W×H)	9X3/9X4	9X3/9X4	9X3/9X4	9X3/9X4	9X3/9X4	9X3/9X4
Cabinet weight (kg)	20/25	20/25	20/25	20/25	20/25	20/25
Maintenance mode	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Cabinet material	iron	iron	iron	iron	iron	iron
Brightness (nits)	5500	6500	6500	6500	6500	6500
Color temperature (K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle (V/H)	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°
Best viewing distance	4-150m	4-150m	5-150m	5-150m	8-200m	10-300m
Contrast ratio	10000:1	10000:1	10000:1	10000:1	10000:1	10000:1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/16 scan	1/6 scan	1/6 scan	1/6 scan	1/3 scan	1/2 scan
Grey level	16bit	16bit	16bit	16bit	16bit	16bit
Refresh rate	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	780	780	780	780	780	780
Avg. power consumption(W/sqm)	200-300	200-300	200-300	200-300	200-300	200-300
Protection grade	IP65	IP65	IP65	IP65	IP65	IP65
Input Power	AC90-264V,47-63Hz					
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS					

HIGH-END ENERGY-SAVING LED DISPLAY Ti SERIES

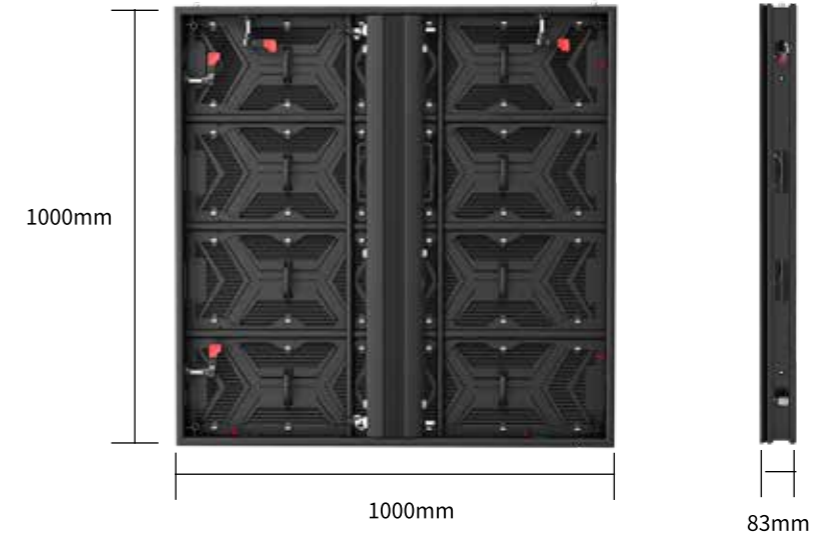

Product features


- Energy saving eye protection
- High brightness
- Front\rear maintenance
- High refresh rate
- Wide viewing angle
- Stadium banner
- High protection
- Ultra thin
- Seamless splicing

Product Parameter

Pixel Pitch	P2.976	P3.91	P4.81	P6.25	P7.81	P10.42
SMD Type	SMD1415	SMD1921	SMD1921	SMD2727	SSMD2727	SMD2727
Physical Density(dots/m ²)	112896	65536	43264	25600	16384	9216
Module Resolution	168X84	128X64	104X52	80X40	64X32	48X24
Module Size (mm)	500X250	500X250	500X250	500X250	500X250	500X250
Panel Dimension(W xH/mm)	1000X1000X83 <small>(Customizable for 1500 width and 500/750 height)</small>	1000X1000X83	1000X1000X83	1000X1000X83	1000X1000X83	1000X1000X83
Panel Resolution	336X336	256X256	208X208	160X160	128X128	96X96
Module quantity(W xH)	2X4	2X4	2X4	2X4	2X4	2X4
Cabinte Weight(kg)	22.5	22.5	22.5	22.5	22.5	22.5
Maintenance Mode	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Brightness(Nits)	4500	6000	6000	6000	6000	6000
Color temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing Angle(V/H)	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°	140°/160°
Best viewing distance	3-100m	4-100m	4-100m	6-150m	8-150m	10-200m
Contrast Ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/21 scan	1/16 scan	1/13 scan	1/8 scan	1/4 scan	1/2 scan
Grey level	16bit	16bit	16bit	16bit	16bit	16bit
Refresh Rate (Hz)	3840	3840	3840	3840	3840	3840
Max power consumption(W/m ²)	800	650	650	650	650	650
Avg power consumption(W/m ²)	200-300	100-200	100-200	100-200	100-200	100-200
Protection grade	IP65	IP65	IP65	IP65	IP65	IP65
Input Power	AC90-264V,47-63Hz					
Working Temp/Humidity(°C/RH)	-20~60°C,10%~85%					
Storage Temp/Humidity(°C/RH)	-20~60°C,10%~85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS					

THE ARC CORNER OPTION

Ti-C SERIES

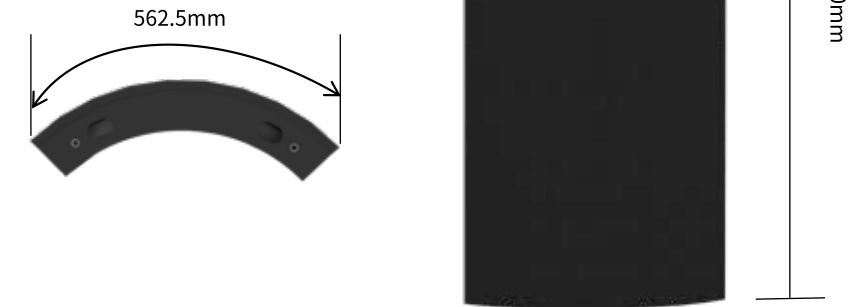

Product features



High end customization



High brightness



Front/Rear access



Remote control



Wide viewing angle



Superior protection

Product Parameter

Pixel pitch	P2.976	P3.91	P4.81	P6.25	P7.81	P10.42
SMD type	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727	SMD2727
Physical density (dots/sqm)	112896	65535	43264	25600	16384	9216
Module resolution	14X84	16X64	13X52	10X40	8X32	6X24
Module dimension	41.66X250	62.5X250	62.5X250	62.5X250	62.5X250	62.5X250
Panel size (mm)	624.96X1000	562.5X1000	562.5X1000	562.5X1000	562.5X1000	562.5X1000
Panel resolution (W×H)	210X336	144X256	117X208	90X160	72X128	54X96
Module quantity (W×H)	15X4	9X4	9X4	9X4	9X4	9X4
Cabinet weight (kg)	28	24.6	24.6	24.6	24.6	24.6
Maintenance mode	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear	Front & Rear
Cabinet material	iron	iron	iron	iron	iron	iron
Brightness (Nits)	5000	5000	6000	5000	5000	5000
Color temperature (K)	5000-12000 Optional					
Visual angle (V/H)	140°/160°					
Flatness(mm)	≤0.1					
Contrast ratio	10000 : 1					
Frame Rate	50/60					
Drive mode	1/21 scan	1/16 scan	1/13 scan	1/8 scan	1/4 scan	1/2 scan
Grey level	16bit	16bit	16bit	16bit	16bit	16bit
Refresh rate (Hz)	3840	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	780	780	780	780	780	780
Avg. power consumption(W/sqm)	200-300	200-300	200-300	200-300	200-300	200-300
Protection grade	IP65	IP65	IP65	IP65	IP65	IP65
Input Power	AC90-264V,47-63Hz					
Working Temp/Humidity(°C/RH)	-20-60°C/10%-85%					
Storage Temp/Humidity(°C/RH)	-20-60°C/10%-85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS					

MEEUS SERIES

3



Application scenario: High-end meeting rooms, lecture halls, exhibition halls and other areas.

All-in-one LED TOUCHING SOLUTION



Product features



High Definition



Wireless projection



Touching features



Smart Whiteboard



Video Conference



Multiple Interfaces



Front Maintenance



Slim Design



Remote Control

Functional characteristics



Efficient and Convenient

Supports documents, pictures, and video display to share all kinds of data information in real time .
Supports multi-party video communication.

Integrated design, convenient maintenance

The unit module and the cabinet are connected by magnetic wireless connection, which allows for quick disassembly and full front maintenance.



Smart Whiteboard

Smart whiteboard function, arbitrary annotation, support multiple people writing at the same time.



High-precision infrared touch technology

Supporting 20-point touch, smooth and silky, the pen appears as soon as it is put down.



Wide Color Gamut

2K/4K optional. 108" 136" 163" various sizes, easy to splice large scenes.



Ultra-thin body

Rounded corner ultra-narrow frame, ultra-thin body, thickness is only 38.2mm.

Product Parameter

Specifications	108"	136"	163"	163"
LED Type	SMD1010/COB	SMD1010/COB	SMD1010//1515/COB	Mini4-in-1/COB
Physical density(dot/sqm)	640000	409600	284444	1137778
Pixel pitch	1.25mm	1.56mm	1.875mm	0.9375mm
Screen size (excluding base)	2440X1456.5mm	3040X1794mm	3640X2141.5mm	3640X2141.5mm
Dimensions	2440X2168mm	3040X2505.5mm	3640X2505.5mm	3640X2505.5mm
Refresh rate(Hz)	3840	3840	3840	3840
Protection level	IP31	IP31	IP31	IP31
Resolution (points)	1920X1080	1920X1080	1920X1080	3840X2160
Video interface	HDMI×3(2 in and 1 out), USB3.0, USB2.0×2, RF			
Vontrol interface	RJ45, USB-B, WiFi, Bluetooth, infrared remote control			
Audio	Built in 2 × 5W speaker with external Audio interface			
Installation and maintenance methods	Mobile base (standard)/wall mounted (optional)/front maintenance			
Input Power	AC90-264V,47-63Hz			
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%			
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%			
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC			

RENTAL DISPLAY SERIES

4



Application scenario :Stage perform, XR virtual shooting, radio and television studios, concert and other areas.

OUTDOOR LED RENTAL SCREEN R3 SERIES



Product features



Modulization



Light & Thin



Arc lock



Easy Maintenance



Flexible splicing



Quick installation



Superior protection





Wide viewing angle



Seamless splicing

Functional characteristics

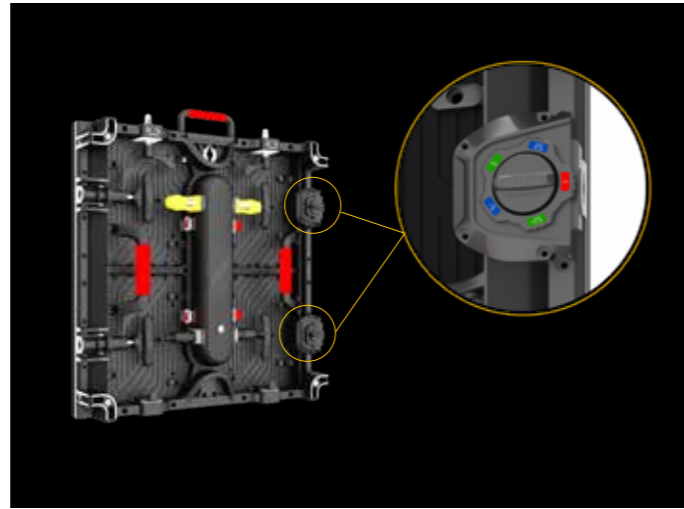
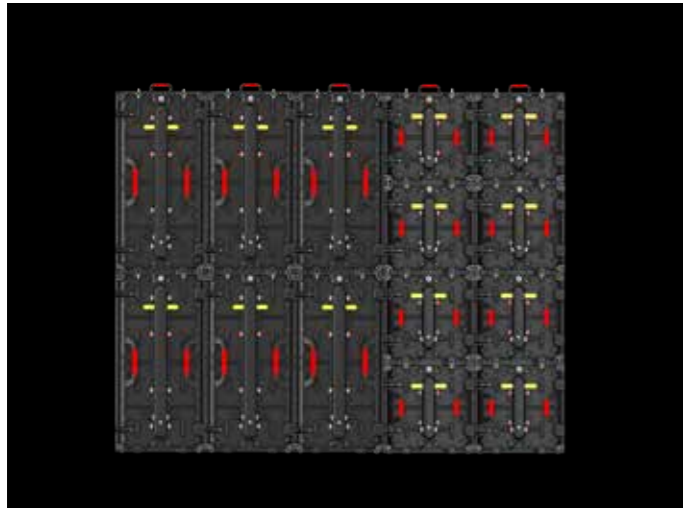


Integrated Design

The 500x500mm box can be easily assembled vertically with the 500x1000mm box, greatly meeting the construction needs of different areas.

High-Precision Arc Lock

Innovative half-Arc lock Design, compatible with straight and arc configurations. Adjustable angle: -5°、-2.5°、0°、+2.5°、+5°.

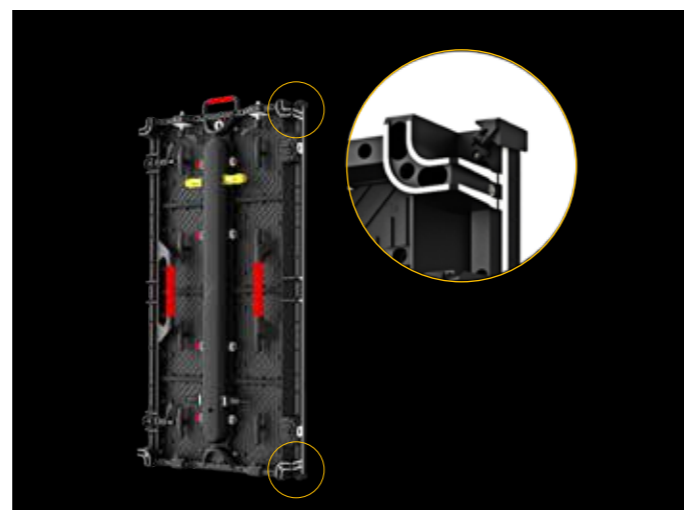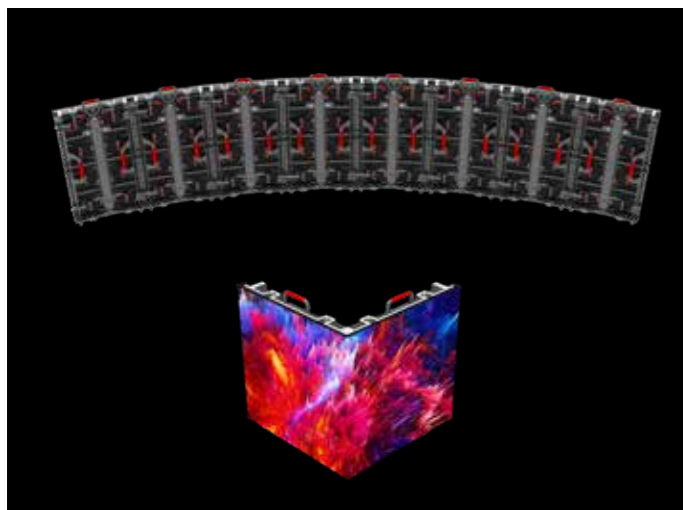


Flexible splicing

Supports right angle splicing, inner and outer curved splicing, and inter locking of large and small cabinets.

High protection



The enclosure is equipped with protective corners. IP65 Waterproof (Front & Rear).

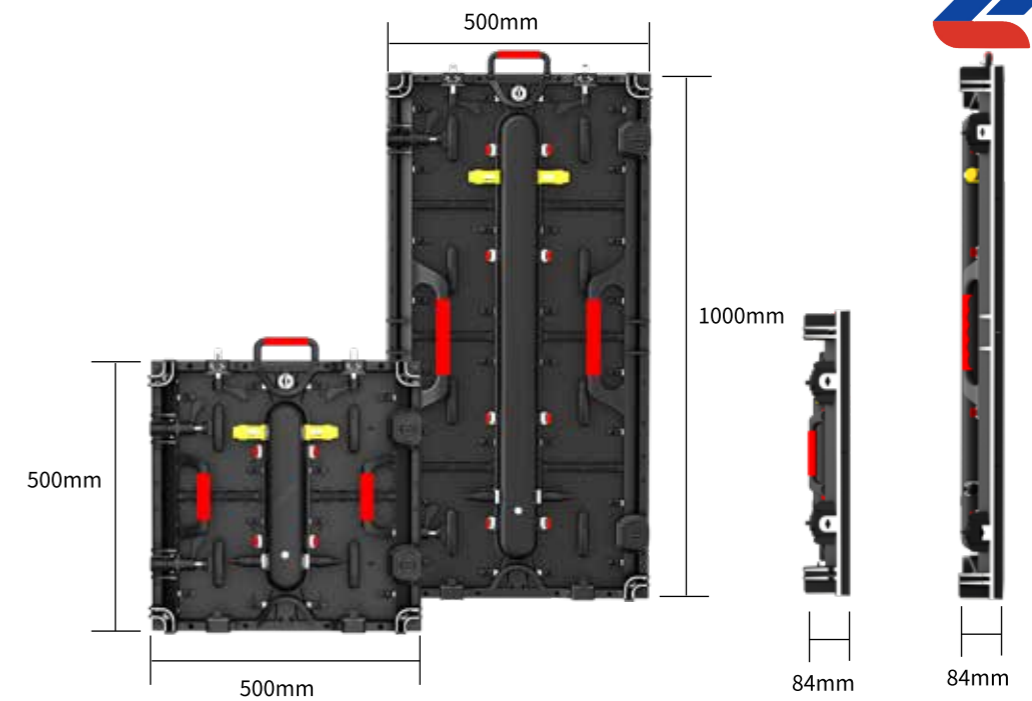

Product Parameter

Pixel Pitch	P2.604	P2.976	P3.91	P4.81	P5.95
LED Type	SMD415	SMD1415	SMD1921	SMD1921	SMD2727
Physical Density(dot/m ²)	147456	112896	65536	43264	28224
Module Resolution	96X96	84X84	64X64	52X52	42X42
Module Size(WXH)	250X250	250X250	250X250	250X250	250X250
Cabinet Size(mm)	500X500(1000)X84	500X500(1000)X84	500X500(1000)X84	500X500(1000)X84	500X500(1000)X84
Cabinet Resolution	192X192/192X384	168X168/168X336	128X128/128X256	104X104/104X208	84X84/84X168
Module Quantity(WXH)	2X2/2X4	2X2/2X4	2X2/2X4	2X2/2X4	2X2/2X4
Weight(kg)	8/14.5	8/14.5	8/14.5	8/14.5	8/14.5
Maintenance	Front/rear Maintenance	Front/rear Maintenance	Front/rear Maintenance	Front/rear Maintenance	Front/rear Maintenance
Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Brightness(Nits)	≥4500	≥4500	≥5000	≥5000	≥5000
Color Temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing Angle(H/V)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Viewing Distance	3-50m	3-100m	4-150m	4-150m	6-200m
Contrast Ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60
Drive mode	1/32 scan	1/28 scan	1/16 scan	1/13 scan	1/7 scan
Grey Scale	16bit	16bit	16bit	16bit	16bit
Refresh Rate(Hz)	3840	3840	3840	3840	3840
Max Power Com.(W/m ²)	800	800	800	800	800
Ave Power Com.(W/m ²)	200-300	200-300	200-300	200-300	200-300
IP Rate	IP65	IP65	IP65	IP65	IP65
Power Input	AC90-264V,47-63Hz				
Working T/H (°C/RH)	-20~60°C/10%~85%				
Storage T/H(°C/RH)	-20~60°C/10%~85%				
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC				

INDOOR LED RENTAL SCREEN R3 SERIES

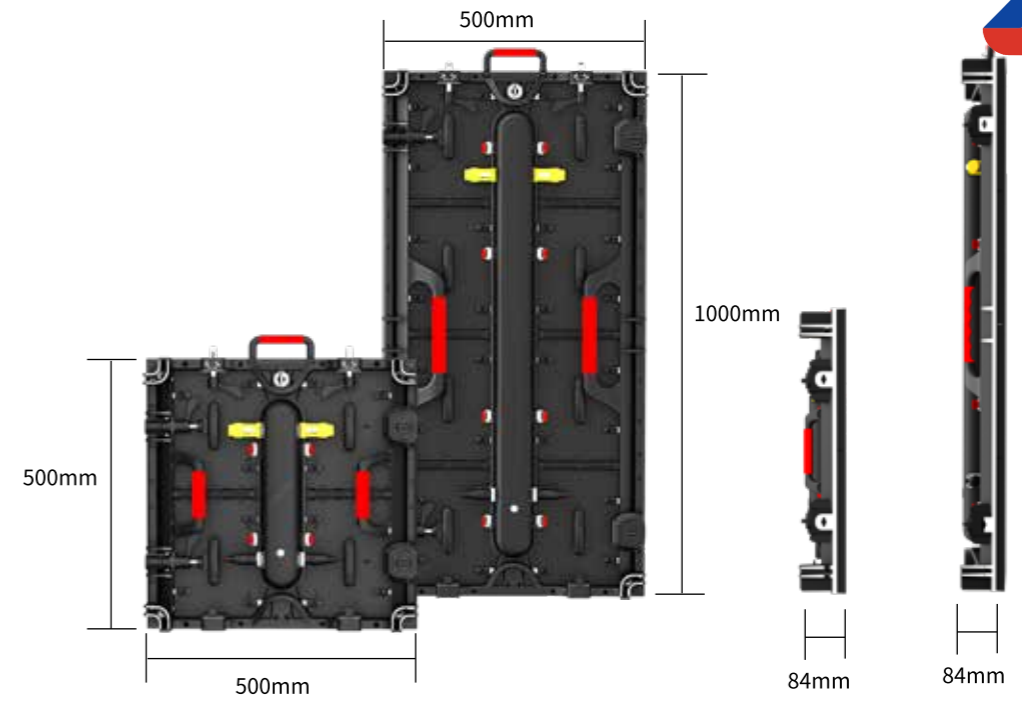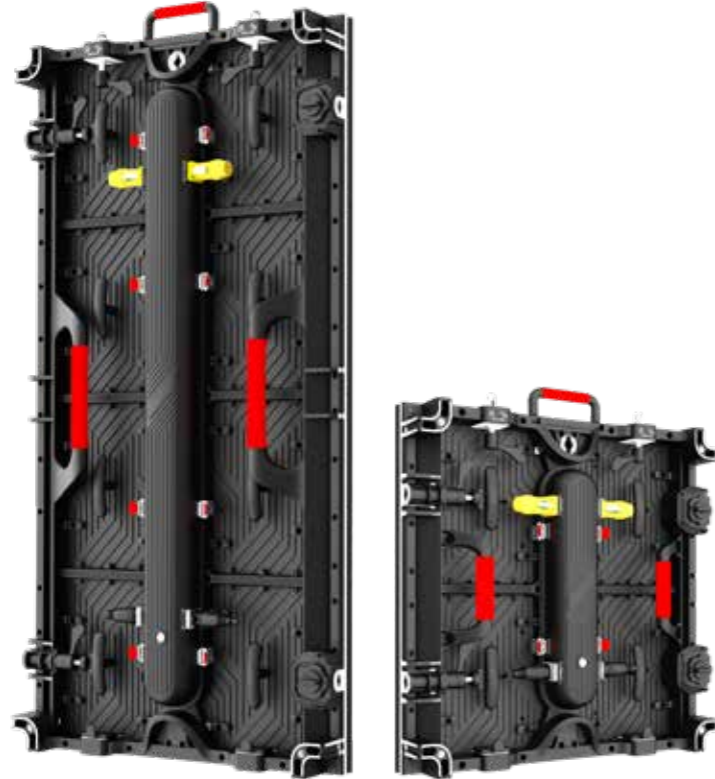

Product features



Modulization



Light & Thin



Arc lock



Easy Maintenance



Flexible splicing



Quick installation



High protection



Wide viewing angle



Seamless splicing

Product Parameter

Pixel Pitch	P1.56	P1.95	P2.5	P2.604	P2.976	P3.91	P4.81
LED Type	SMD1212	SMD1515	SMD1515	SMD1515	SMD1515	SMD2020	SMD2020
Physical Density(dot/m ²)	409600	262144	160000	147456	112896	65536	43264
Module Resolution	160X160	128X128	100X100	96X96	84X84	64X64	52X52
Module Size(WXH)	250X250	250X250	250X250	250X250	250X250	250X250	250X250
Cabinet Size(mm)	500X500X84	500X500X84	500X500X84	500X500X84	500X500(1000)X84	500X500(1000)X84	500X500(1000)X84
Cabinet Resolution	320X320	256X256	200X200	192X192	168X168/168X336	128X128/128X256	104X104/104X208
Module Quantity(WXH)	2X2	2X2	2X2	2X2	2X2/2X4	2X2/2X4	2X2/2X4
Weight(kg)	8	8	8	8	8/14.5	8/14.5	8/14.5
Maintenance	Front/rear Maintenance						
Cabinet Material	Die-cast Aluminum						
Color Temperature(K)	5000-12000 Optional						
Viewing Angle(H/V)	160°/160°						
Brightness(Nits)	≥600	≥600	≥800	≥800	≥800	≥1000	≥1000
Viewing Distance	2-50m	2-50m	3-50m	3-50m	3-100m	4-100m	4-100m
Contrast Ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan	1/13 scan
Grey Scale	16bit	16bit	16bit	16bit	16bit	16bit	16bit
Refresh Rate(Hz)	3840	3840	3840	3840	3840	3840	3840
Max Power Com.(W/m ²)	800	800	800	800	800	800	800
Ave Power Com.(W/m ²)	200-300	200-300	200-300	200-300	200-300	200-300	200-300
IP Rate	IP31	IP31	IP31	IP31	IP31	IP31	IP31
Power Input	AC90-264V,47-63Hz						
Working T/H (°C/RH)	-20~60°C/10%~85%						
Storage T/H(°C/RH)	-20~60°C/10%~85%						
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC/BIS						

OUTDOOR LED RENTAL SCREEN R SERIES



Product features



Arc-shape Adjustable



High refresh rate



Front/rear maintenance



Seamless splicing



Wide Viewing-angle



High-precision Structure

Product Parameter

Pixel Pitch	P2.604	P2.976	P3.91	P4.81	P5.95
LED Type	SMD1415	SMD1415	SMD1921	SMD1921	SMD2727
Physical density(dot/sqm)	147456	112896	65536	43264	28224
Module resolution	96X96	84X84	64X64	52X52	42X42
Module size(mm)	250X250	250X250	250X250	250X250	250X250
Cabinet size(mm)	500X500(1000)X84.5	500X500(1000)X84.5	500X500(1000)X84.5	500X500(1000)X84.5	500X500(1000)X84.5
Cabinet resolution	192X192/192X384	168X168/168X336	128X128/128X256	104X104/104X208	84X84/84X168
Module QTY(WXH)	2X2/2X4	2X2/2X4	2X2/2X4	2X2/2X4	2X2/2X4
Cabinet weight(kg)	8/14.5	8/14.5	8/14.5	8/14.5	8/14.5
Maintenance	Front/rear	Front/rear	Front/rear	Front/rear	Front/rear
Cabinet material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Brightness(Nits)	≥4500	≥4500	≥5000	≥5000	≥5000
Color temperature(K)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Viewing angle(V/H)	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Viewing distance	3-50m	3-100m	4-150m	4-150m	6-200m
Contrast ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60
Drive mode	1/32 scan	1/28 scan	1/16 scan	1/13 scan	1/7 scan
Grey level	16bit	16bit	16bit	16bit	16bit
Refresh rate(Hz)	3840	3840	3840	3840	3840
Max. power consumption(W/sqm)	800	800	800	800	800
Avg. power consumption(W/sqm)	200-300	200-300	200-300	200-300	200-300
Protection grade	IP65	IP65	IP65	IP65	IP65
Input Power	AC90-264V,47-63Hz				
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%				
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%				
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC				

INDOOR LED RENTAL SCREEN R SERIES



Product features



Arc-shape Adjustable



High refresh rate



Front/rear maintenance



Seamless splicing



Wide Viewing-angle




High-precision Structure

Product Parameter

Pixel Pitch	P1.56	P1.95	P2.5	P2.604	P2.976	P3.91	P4.81
LED Type	SMD1212	SMD1515	SMD1515	SMD1515	SMD1515	SMD2020	SMD2020
Physical Density(dot/m ²)	409600	262144	160000	147456	112896	65536	43264
Module Resolution	160X160	128X128	100X100	96X96	84X84	64X64	52X52
Module Size(WXH)	250X250	250X250	250X250	250X250	250X250	250X250	250X250
Cabinet Size(mm)	500X500X84.5	500X500X84.5	500X500X84.5	500X500X84.5	500X500(1000)X84.5	500X500(1000)X84.5	500X500(1000)X84.5
Cabinet Resolution	320X320	256X256	200X200	192X192	168X168/168X336	128X128/128X256	104X104/104X208
Module Quantity(WXH)	2X2	2X2	2X2	2X2	2X2/2X4	2X2/2X4	2X2/2X4
Weight(kg)	8	8	8	8	8/14.5	8/14.5	8/14.5
Maintenance	Front/rear Maintenance						
Cabinet Material	Die-cast Aluminum						
Color Temperature(K)	5000-12000 Optional						
Viewing Angle(H/V)	160°/160°						
Brightness(Nits)	≥600	≥600	≥800	≥800	≥800	≥1000	≥1000
Viewing Distance	3-50m	3-100m	4-150m	4-150m	6-200m	4-100m	4-100m
Contrast Ratio	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1	10000 : 1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/40 scan	1/32 scan	1/25 scan	1/32 scan	1/28 scan	1/16 scan	1/13 scan
Grey Scale	16bit	16bit	16bit	16bit	16bit	16bit	16bit
Refresh Rate(Hz)	3840	3840	3840	3840	3840	3840	3840
Max Power Com.(W/m ²)	800	800	800	800	800	800	800
Ave Power Com.(W/m ²)	200-300	200-300	200-300	200-300	200-300	200-300	200-300
Protection grade	IP31	IP31	IP31	IP31	IP31	IP31	IP31
Power Input	AC90-264V,47-63Hz						
Working T/H (°C/RH)	-20~60°C/10%~85%						
Storage T/H(°C/RH)	-20~60°C/10%~85%						
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC						

INDOOR LED RENTAL SCREEN XR SERIES

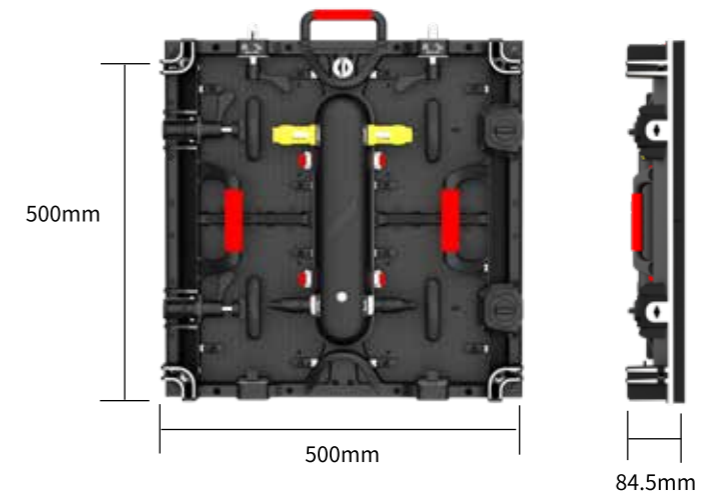

Product features



Arc-shape Adjustable



High refresh rate



Front/rear maintenance



Seamless splicing



Wide Viewing-angle



High-precision Structure

Product Parameter

Pixel Pitch	P1.95	P2.315	P2.604
LED Type	SMD1515	SMD1515	SMD1515
Physical Density(dot/m ²)	262144	186624	147456
Module Resolution	128X128	108X108	96X96
Module Size(WXH)	250X250	250X250	250X250
Cabinet Size(mm)	500X500X84.5	500X500X84.5	500X500X84.5
Cabinet Resolution	256X256	216X216	192X192
Module Quantity(WXH)	2X2	2X2	2X2
Weight(kg)	8	8	8
Maintenance	Front/rear	Front/rear	Front/rear
Cabinet Material	Die-cast Aluminum	Die-cast Aluminum	Die-cast Aluminum
Color Temperature(K)	≥1500	≥1500	≥1500
Viewing Angle(H/V)	5000-12000 Optional	5000-12000 Optional	5000-12000 Optional
Brightness(Nits)	160°/160°	160°/160°	160°/160°
Viewing Distance	2-50m	3-50m	3-50m
Contrast Ratio	10000 : 1	10000 : 1	10000 : 1
Frame Rate	60/120	60/120	60/120
Drive mode	1/8 scan	1/9 scan	1/8 scan
Grey Scale	16bit	16bit	16bit
Refresh Rate(Hz)	7680	7680	7680
Max Power Com.(W/m ²)	920	920	920
Ave Power Com.(W/m ²)	200-300	200-300	200-300
IP Rate	IP31	IP31	IP31
Power Input	AC90-264V,47-63Hz		
Working T/H (°C/RH)	-20~60°C/10%~85%		
Storage T/H(°C/RH)	-20~60°C/10%~85%		
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC		

LED DANCE FLOOR

Functional characteristics

Interactive

Equipped with built-in control chip and interactive system, 128/256 sensing points can be selected per square meter. More precise response, more sensitive response, and smooth interactive effect.



Strong Load-bearing

Professional customized high-strength die cast aluminum cabinet with a load-bearing capacity of 2000kg/m², fearless of car crushing.



Product features



Interactive



Light & Thin



Strong Load-bearing



Easy Maintenance





Full perspective



GOB protection

Fast Installation

The custom Foundation feet for installation are set up, allowing for precise alignment with the support corners to achieve horizontal positioning and quick assembly.

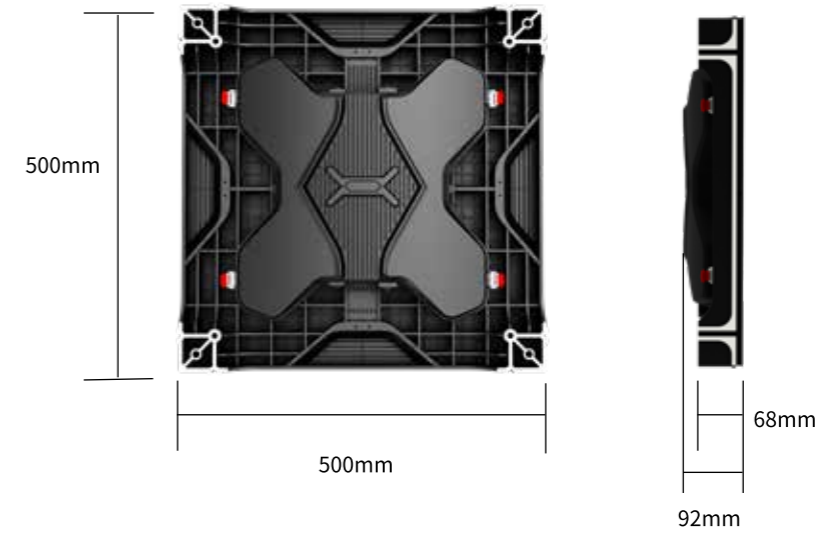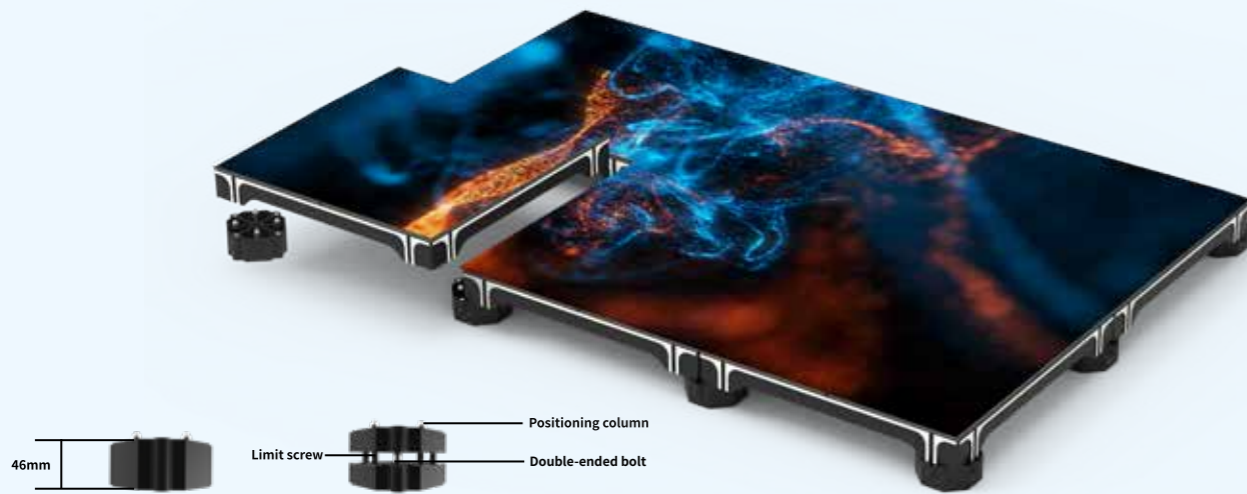


Product Parameter

Pixel Pitch	P1.56	P1.9	P2.5	P2.604	P2.976	P3.91
LED Type	SMD1515	SMD1515	SMD1515	SMD1515	SMD1515	SMD2020
Physical Density(dot/m ²)	262144	262144	160000	147456	112896	65536
Module Resolution	128X128	128X128	100X100	96X96	84X84	64X64
Module Size(WXH)	250X250	250X250	250X250	250X250	250X250	250X250
Cabinet Size(mm)	500X500X92	500X500X92	500X500X92	500X500X92	500X500X92	500X500X92
Cabinet Resoluiton	256X256	256X256	200X200	192X192	168X168	128X128
Module Qnantity (WXH)	2X2	2X2	2X2	2X2	2X2	2X2
Cabinet Weight(kg)	10.8	10.8	10.8	10.8	10.8	10.8
Maintenance Mode	Front Maintenance					
Material	Die-cast Aluminum					
Brightness(Nits)	≥800					
Color Temperature(K)	5000-12000 Optional					
Viewing Angle(V/H)	160°/160°					
Contrast Ratio	10000 : 1					
Frame Rate	50/60					
Drive mode	1/32 scan	1/32 scan	1/20 scan	1/16 scan	1/14 scan	1/16 scan
Grey Scale	16bit	16bit	16bit	16bit	16bit	16bit
Refresh Rate(Hz)	3840	3840	3840	3840	3840	3840
Max Power Con.(W/m ²)	800	800	800	800	800	800
Ave Power Con.(W/m ²)	200-300	200-300	200-300	200-300	200-300	200-300
Protection Level	IP31	IP31	IP31	IP31	IP31	IP31
Power Input	AC90-264V,47-63Hz					
Operation T/H(°C/RH)	-20~60°C/10%~85%					
Storate T/H(°C/RH)	-20~60°C/10%~85%					
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC					


Fasy maintenance

The module adopts a magnetic front maintenance design to achieve the maintenance of the module, power supply, and receiving card, saving time and effort.

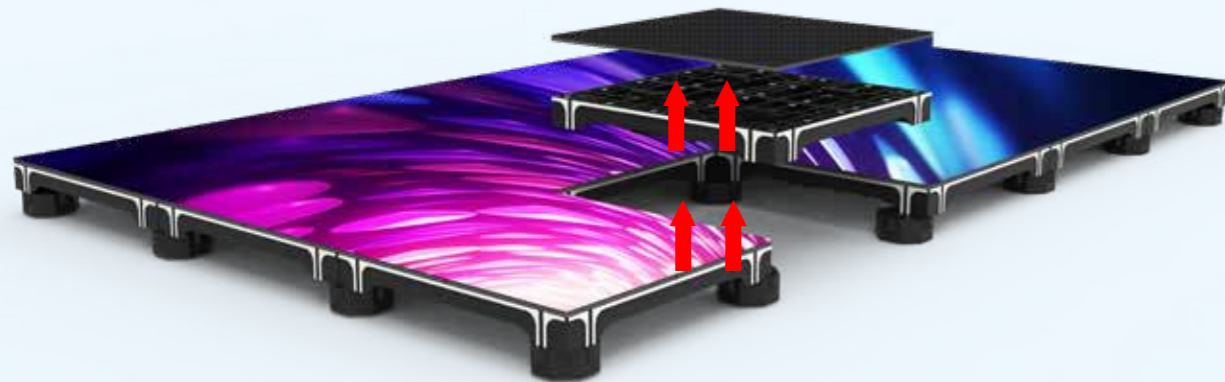


CREATIVE DISPLAY SERIES

5

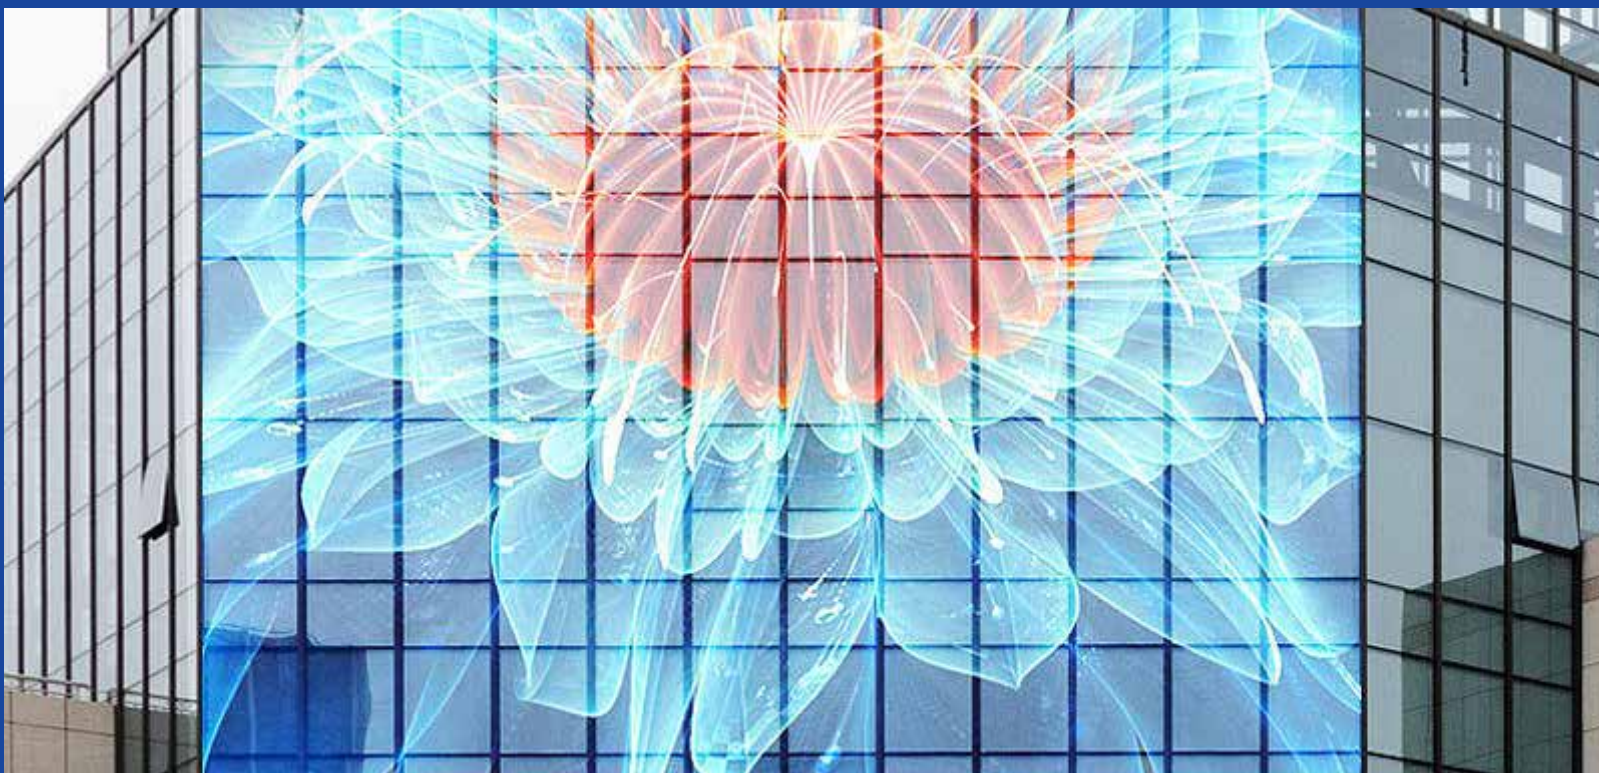

Applicable scenarios: Stage performances, TV stations, shopping malls, sports venues, amusement parks, museums, science museums, exhibition halls, hotels and other areas.

OUTDOOR LED ICE SCREEN

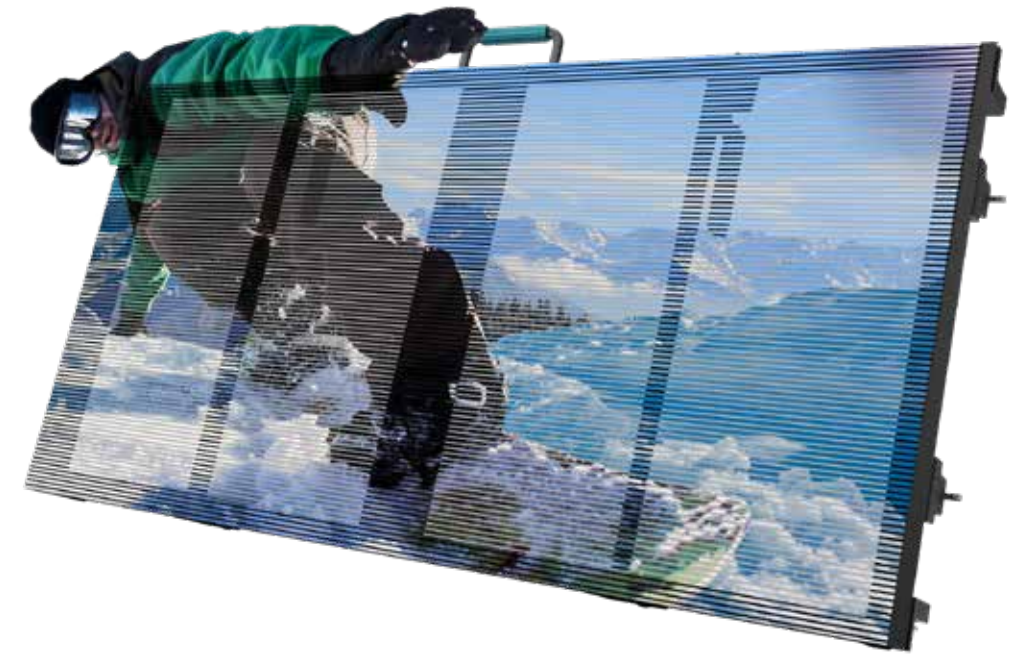

Product features



HD



High Transparency



Light Weight



High Refresh Rate



Wide viewing angle



Front/rear Maintenance



Outdoor waterproofing




Customization




Seamless splicing

INDOOR LED ICE SCREEN

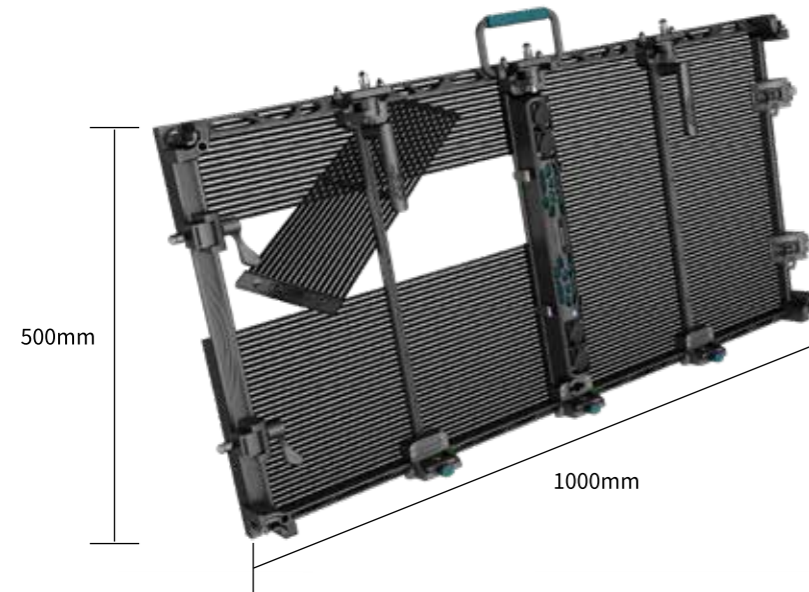

Product Parameter

Pixel pitch	P3.91-7.81
Pixel spacing (mm)	3.91(about) 7.82(up and down)
LED Type	SMD1921
Physical density(dot/sqm)	32768
Drive mode	8-16
Brightness (cd/m ²)	1500-2500
Transparency	70%-85%
Refresh rate(Hz)	3840
Brightness adjustment	Level 256
Viewing angle(V/H)	160°/160°
Best Viewing Distance	4m-50m
Power supply requirements	AC90-264V
Max. power consumption(W/sqm)	800
Avg. power consumption(W/sqm)	150-250
Cabinet size(mm)	1000X500
Installation method	Seat installation and lifting
Maintenance	Front/rear
Input Power	AC90-264V,47-63Hz
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC

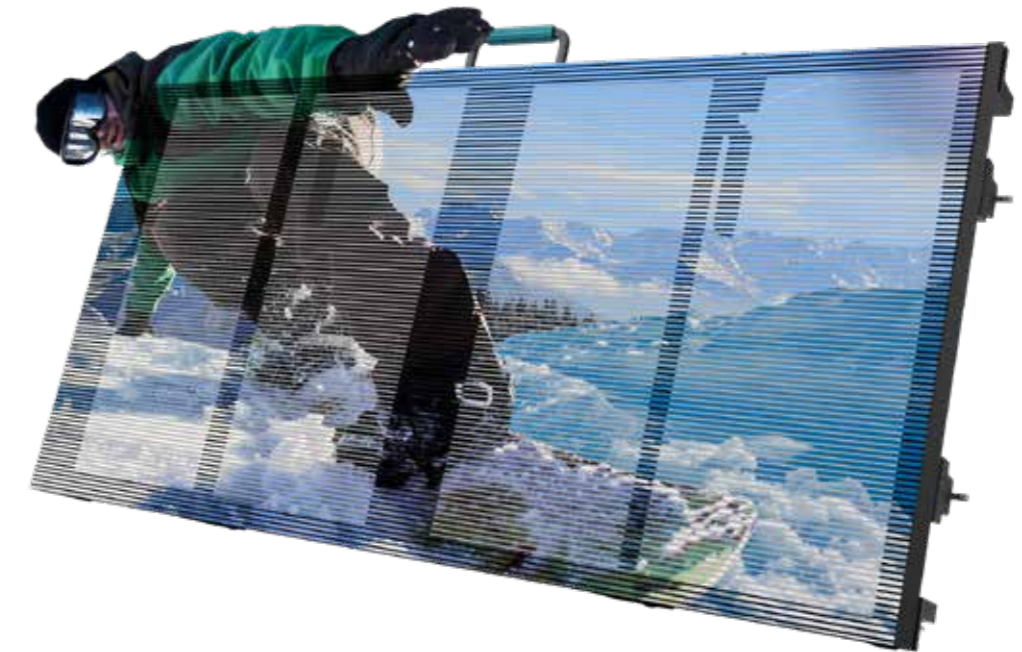

Product Parameter

Pixel pitch	P2.5-5.0	P3.91-7.81
Pixel spacing (mm)	2.5(about) 5.0(up and down)	3.91(about) 7.82(up and down)
LED Type	SMD1415/1515	SMD1921/2020
Physical density(dot/sqm)	80000	32768
Drive mode	16-32	8-16
Brightness (cd/m ²)	1500-2500	1500-2500
Transparency	70%-85%	70%-85%
Refresh rate(Hz)	3840	3840
Protection level	IP31	IP31
Brightness adjustment	Level 256	Level 256
Viewing angle(V/H)	160°/160°	160°/160°
Best Viewing Distance	3m-50m	4m-50m
Power supply requirements	AC90-264V	AC90-264V
Max. power consumption(W/sqm)	800	800
Avg. power consumption(W/sqm)	150-250	150-250
Cabinet size(mm)	1000X500	1000X500
Installation method	Seat installation and lifting	Seat installation and lifting
Maintenance	Front/rear	Front/rear
Input Power	AC90-264V,47-63Hz	
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%	
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%	
Cert.	CCC/CE/RoHS/FCC/CB/TUV/IEC	

FLEXIBLE LED SCREEN



Product features



Flatness



Non degumming



Wide Viewing-angle




Customization



Flexible



Front\rear maintenance

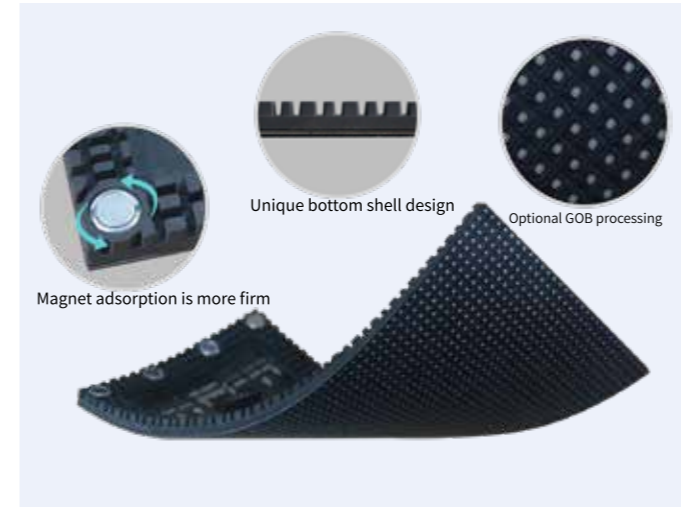

Ultimate flexibility

Magnet adsorption, more secure, easy and fast installation, silicone mask, soft and bendable.



High end customization

Four 240X120mm modules are spliced to form a cylindrical shape with an inner diameter of ≤ 30.5 cm.

Product Parameter

Pixel Pitch	P1.25	P1.53	P1.86	P1.875	P2	P2.5	P3	P4
LED Type	SMD1010	SMD1212	SMD1515	SMD1515	SMD1515	SMD2020	SMD2020	SMD2020
Physical Density(dots/m ²)	640000	422500	288906	284444	250000	160000	111111	62500
Module Resolution	192X96	208X104	172X86	128X84	120X60	96X48	80X40	60X30/64X32
Module Size(WXH)	240X120	320X160	320X160	240X120	240X120	240X120	240X120	240X120/256X128
Cabinet Size(mm)	960X960	960X960	960X960	960X960	960X960	960X960	960X960	960X960/1024X768
Cabinet Materials	Iron							
Color Temperature(K)	5000-12000 Optional							
Viewing Angle(V/H)	160°/160°							
Viewing Distance	1.25-50m	1.25-50m	1.25-50m	1.25-50m	1.25-50m	1.25-50m	1.25-50m	1.25-50m
Contrast Ratio	10000:1	10000:1	10000:1	10000:1	10000:1	10000:1	10000:1	10000:1
Frame Rate	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Drive mode	1/64 scan	1/52 scan	1/43 scan	1/32 scan	1/30 scan	1/24 scan	1/20 scan	1/16 scan
Grey Level	16bit	16bit	16bit	16bit	16bit	16bit	16bit	16bit
Refresh rate(Hz)	3840	3840	3840	3840	3840	3840	3840	3840
Max Power Consumption(W/m ²)	600	600	600	600	600	600	600	600
Ave. Power Consumption(W/m ²)	80-150	80-150	80-150	80-150	80-150	80-150	80-150	80-150
Protection grade	IP31	IP31	IP31	IP31	IP31	IP31	IP31	IP31
Input Power	AC90-264V,47-63Hz							
Working Temp/Humidity(°C/RH)	-20~60°C/10%~85%							
Storage Temp/Humidity(°C/RH)	-20~60°C/10%~85%							

Cert.

CCC/CE/RoHS/FCC/CB/TUV/IEC

CLASSIC CASE



CLASSIC CASE

